




FABBRICA CAVI - ANTENNE - ACCESSORI TV



CPU 3...

MULTICORES CABLE SINGLE HELICALLY SCREENED

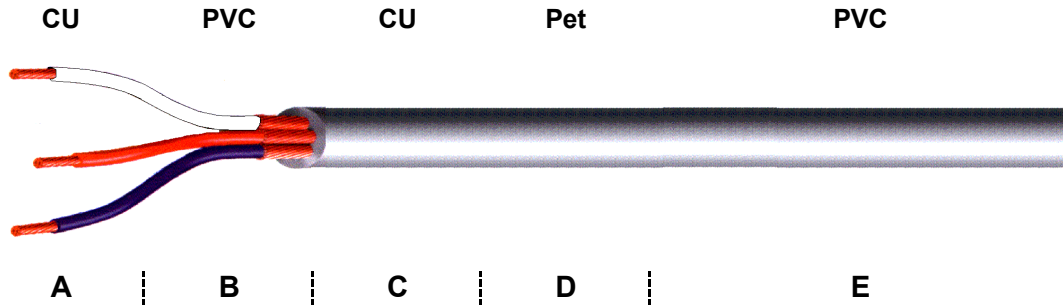

- A INNER CONDUCTOR PLAIN COPPER
- B INSULATION POLYVINYL-CHLORIDE
- C SPIRAL SHIELD PLAIN COPPER
- D NON-MIGRATING POLYESTER TAPE
- E SHEATH POLYVINYL-CHLORIDE
 - COLOUR GREY - RAL 7001

TEMPERATURE RANGE -40 °C / +70 °C

MECHANICAL DATA

	INNER CONDUCTOR		SHIELD COVERAGE	SHEATH	WEIGHT KG/KM	
	CONSTRUCTION	SECTION			COPPER	TOTAL
CPU 3014	3 x (12 x 0,12 mm)	3 x 0,14 mm ²	75%	ø 4,40 ± 0,20 mm	11,1	31,4
CPU 3022	3 x (7 x 0,20 mm)	3 x 0,22 mm ²	75%	ø 4,80 ± 0,20 mm	13,2	35,2

ELECTRICAL PROPERTIES at 20°C

	CAPACITANCE		CORES RESISTANCE	VOLTAGE	
	CORE TO CORE	CORE TO SHIELD		OPERATING	TEST
CPU 3014	130 pF/m	270 pF/m	122 Ohm/Km	250 Vca	1200 Vca
CPU 3022	140 pF/m	280 pF/m	82 Ohm/Km	250 Vca	1200 Vca

The producer reserves himself to make modification on the item without any notice.