




FABBRICA CAVI - ANTENNE - ACCESSORI TV



CPU 7...

MULTICORES CABLE SINGLE HELICALLY SCREENED

CU PVC CU Pet PVC

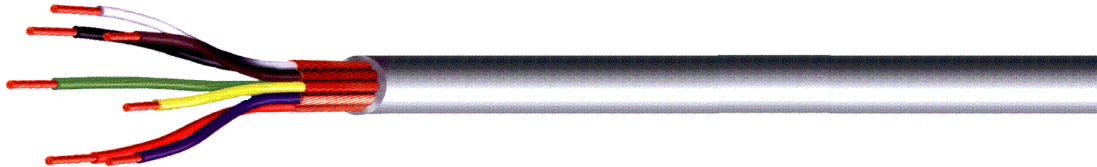

A B C D E

- A INNER CONDUCTOR PLAIN COPPER
- B INSULATION POLYVINYL-CHLORIDE
- C SPIRAL SHIELD PLAIN COPPER
- D NON-MIGRATING POLYESTER TAPE
- E SHEATH POLYVINYL-CHLORIDE
 - COLOUR GREY - RAL 7001

TEMPERATURE RANGE -40 °C / +70 °C

MECHANICAL DATA

	INNER CONDUCTOR		SHIELD COVERAGE	SHEATH	WEIGHT KG/KM	
	CONSTRUCTION	SECTION			COPPER	TOTAL
CPU 7014	7 x (12 x 0,12 mm)	7 x 0,14 mm ²	75%	ø 6,00 ± 0,20 mm	25,9	62,2
CPU 7022	7 x (7 x 0,20 mm)	7 x 0,22 mm ²	75%	ø 6,70 ± 0,20 mm	30,8	71,7

ELECTRICAL PROPERTIES at 20°C

	CAPACITANCE		CORES RESISTANCE	VOLTAGE	
	CORE TO CORE	CORE TO SHIELD		OPERATING	TEST
CPU 7014	130 pF/m	270 pF/m	122 Ohm/Km	250 Vca	1200 Vca
CPU 7022	140 pF/m	280 pF/m	82 Ohm/Km	250 Vca	1200 Vca

The producer reserves himself to make modification on the item without any notice.