


# CW 0422.5 ZH

WARNING CABLE

CEI 20-11 CEI-UNEL 36762 C-4 (U<sub>o</sub> = 400 V)

Classe CPR **C**ca-s1b, d1, a1

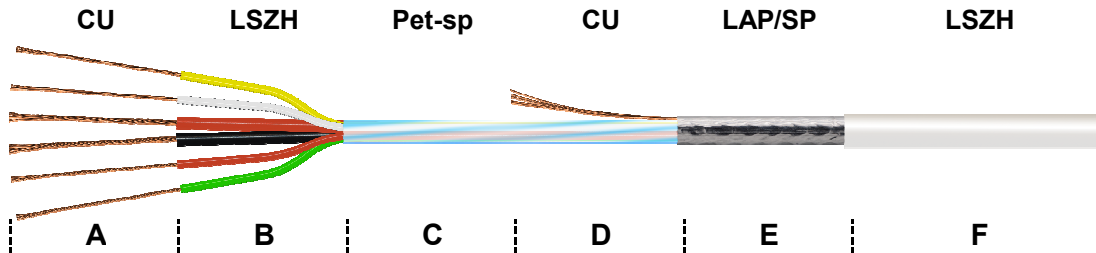

- A INNER CONDUCTOR** ..... PLAIN COPPER
- B INSULATION** ..... FLAME RETARDANT NON-CORROSIVE  
THERMOPLASTIC FREE OF HALOGENS
- C NON-MIGRATING** ..... SPIRAL POLYESTER TAPE
- D DRAIN WIRE** ..... PLAIN COPPER
- E SHIELD** ..... SPIRAL ALUMINIUM + POLYESTER TAPE  
COVERAGE 100%
- F SHEATH** ..... FLAME RETARDANT NON-CORROSIVE  
THERMOPLASTIC FREE OF HALOGENS

- PRINTING **SIVA CAVO ALLARME 2 X 0,50 + 4 X 0,22 CEI-UNEL 36762  
C-4 (U<sub>o</sub> = 400 V) MADE IN ITALY CE 62 SETT/ANNO  
EN 50575:2014 + A1:2016 Cca-s1b, d1, a1**

TEMPERATURE RANGE ..... -25°C / +80°C

## MECHANICAL DATA

	CONSTRUCTION	SECTION	SHEATH	WEIGHT KG/KM TOTAL
<b>CW 0422.5 ZH</b>	4 x (7 x 0,18 mm)	4 x 0,22 mm <sup>2</sup>	ø 4,80 ± 0,20 mm	bianco 9003
	2 x (16 x 0,18 mm)	2 x 0,50 mm <sup>2</sup>		

## ELECTRICAL PROPERTIES at 20°C

	VOLTAGE		CORES RESISTANCE		MIN. RESISTANCE INSULATION
	OPERATING	TEST	0,22 mm <sup>2</sup>	0,50 mm <sup>2</sup>	
<b>CW 0422.5 ZH</b>	150 V	2000 V	100 Ohm/Km	42 Ohm/Km	200 MOhm/Km

The producer reserves himself to make modification on the item without any notice.