




FABBRICA CAVI - ANTENNE - ACCESSORI TV



# HFL 2... E

## HI-FI CAR LOUDSPEAKER

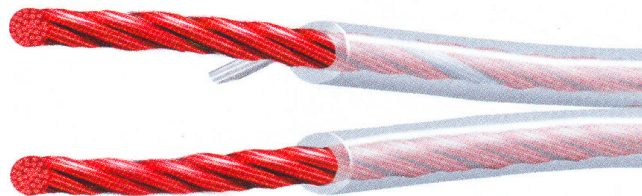

**INNER CONDUCTOR** ..... PLAIN COPPER

**SHEATH** ..... POLYVINYL-CHLORIDE

- **COLOUR** ..... NEUTRAL

**TEMPERATURE RANGE** ..... -30 °C / +70 °C

### MECHANICAL DATA

	CONSTRUCTION	SECTION	SHEATH	WEIGHT KG/KM	
				COPPER	TOTAL
<b>HFL 2100 E</b>	2 x ( 126 x 0,10 mm )	2 x 1,00 mm <sup>2</sup>	ø 2,90 x 6,00 ± 0,20 mm	18,0	36,0
<b>HFL 2150 E</b>	2 x ( 189 x 0,10 mm )	2 x 1,50 mm <sup>2</sup>	ø 3,20 x 6,50 ± 0,20 mm	27,0	45,0
<b>HFL 2200 E</b>	2 x ( 252 x 0,10 mm )	2 x 2,00 mm <sup>2</sup>	ø 3,50 x 7,20 ± 0,20 mm	36,0	60,0
<b>HFL 2250 E</b>	2 x ( 315 x 0,10 mm )	2 x 2,50 mm <sup>2</sup>	ø 3,90 x 8,00 ± 0,20 mm	45,0	75,0
<b>HFL 2300 E</b>	2 x ( 378 x 0,10 mm )	2 x 3,00 mm <sup>2</sup>	ø 4,40 x 9,00 ± 0,20 mm	54,0	90,0
<b>HFL 2350 E</b>	2 x ( 441 x 0,10 mm )	2 x 3,50 mm <sup>2</sup>	ø 4,60 x 9,40 ± 0,20 mm	63,0	101,0
<b>HFL 2400 E</b>	2 x ( 504 x 0,10 mm )	2 x 4,00 mm <sup>2</sup>	ø 4,80 x 9,80 ± 0,20 mm	72,0	114,0
<b>HFL 2600 E</b>	2 x ( 756 x 0,10 mm )	2 x 6,00 mm <sup>2</sup>	ø 6,00 x 12,50 ± 0,20 mm	106,0	166,0

### ELECTRICAL PROPERTIES at 20°C

	VOLTAGE		CORES RESISTANCE
	OPERATING	TEST	
<b>HFL 2100 E</b>	300 Vca	1500 Vca	18 Ohm/Km
<b>HFL 2150 E</b>	300 Vca	1500 Vca	12 Ohm/Km
<b>HFL 2200 E</b>	300 Vca	1500 Vca	9 Ohm/Km
<b>HFL 2250 E</b>	300 Vca	1500 Vca	8 Ohm/Km
<b>HFL 2300 E</b>	300 Vca	1500 Vca	7 Ohm/Km
<b>HFL 2350 E</b>	300 Vca	1500 Vca	6,5 Ohm/Km
<b>HFL 2400 E</b>	300 Vca	1500 Vca	6 Ohm/Km
<b>HFL 2600 E</b>	300 Vca	1500 Vca	5 Ohm/Km

The producer reserves himself to make modification on the item without any notice.