



FABBRICA CAVI - ANTENNE - ACCESSORI TV




M 3... AF

MICROPHONE CABLE PLAIN COPPER BRAID

COMPLIANCE WITH CEI 20-11 CEI 20-22 / II CEI 20-35 I / II IEC 60332 I / II / III STANDARDS

CU PVC CU PLSF

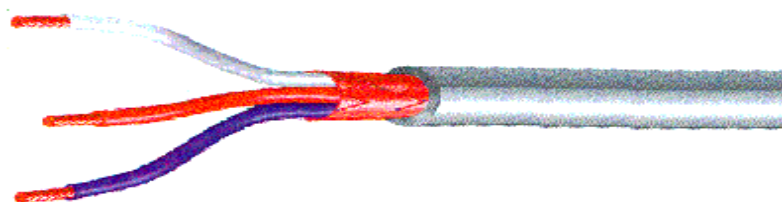

A B C D

- A** INNER CONDUCTOR PLAIN COPPER
- B** INSULATION POLYVINYL-CHLORIDE
..... COTTON
- C** BRAID PLAIN COPPER
- D** SHEATH FLAME RETARDANT POLYVINYL-CHLORIDE
- COLOUR GREY - RAL 7001
GR3 = Insulation sheath 450 / 750 V.

TEMPERATURE RANGE -25 °C / +80 °C

MECHANICAL DATA

	INNER CONDUCTOR		SHIELD COVERAGE	SHEATH	WEIGHT KG/KM	
	CONSTRUCTION	SECTION			COPPER	TOTAL
M 3050 AF	3x(16 x 0,20 mm)	3 x 0,50 mm ²	69%	ø 5,50 ± 0,20 mm	21,1	48,7
M 3075 AF	3x(24 x 0,20 mm)	3 x 0,75 mm ²	63%	ø 6,10 ± 0,20 mm	28,4	60,5

ELECTRICAL PROPERTIES at 20°C

	CAPACITANCE		CORES RESISTANCE	VOLTAGE	
	CORE TO CORE	CORE TO SHIELD		OPERATING	TEST
M 3050 AF	120 pF/m	250 pF/m	39 Ohm/Km	250 Vca	1200 Vca
M 3075 AF	130 pF/m	310 pF/m	26 Ohm/Km	300 Vca	2000 Vca

The producer reserves himself to make modification on the item without any notice.