


CW

WARNING CABLE
CEI-UNEL 36762 C-4 (U_o = 400 V)

Class CPR **E_{ca}**

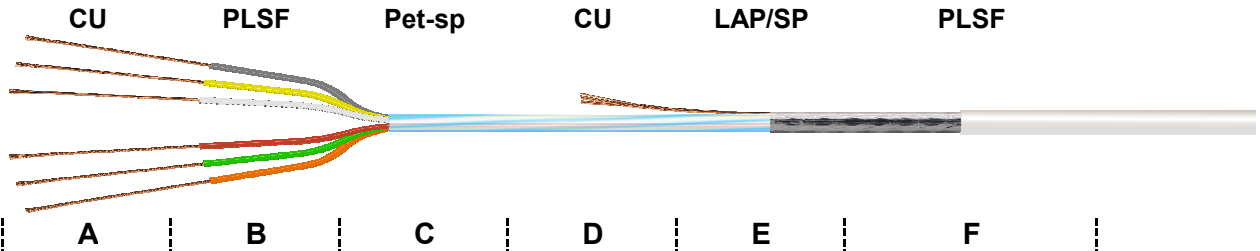

| | | | |
|----------|------------------------|-------|--|
| A | INNER CONDUCTOR | | PLAIN COPPER |
| B | INSULATION | | LOW SMOKE AND FUME POLYVINYL-CHLORIDE |
| C | NON-MIGRATING | | SPIRAL POLYESTER TAPE |
| D | DRAIN WIRE | | PLAIN COPPER |
| E | SHIELD | | SPIRAL ALUMINIUM + POLYESTER TAPE COVERAGE 100% |
| F | SHEATH | | LOW SMOKE AND FUME POLYVINYL-CHLORIDE |

- PRINTING

**SIVA CAVO ALLARME SECTION MM² CEI-UNEL 36762
C-4 (U_o = 400 V) MADE IN ITALY CE 62 SETT/ANNO
EN 50575:2014 + A1:2016 Eca**

TEMPERATURE RANGE -25°C / +80°C

MECHANICAL DATA

| | CONSTRUCTION | SECTION | SHEATH | WEIGHT KG/KM TOTAL |
|----------------|--------------------|---------------------------|------------------|--------------------------|
| CW 0222 | 2 x (7 x 0,18 mm) | 2 x 0,22 mm ² | ø 3,10 ± 0,20 mm | White - RAL 9003 13,8 |
| CW 0422 | 4 x (7 x 0,18 mm) | 4 x 0,22 mm ² | ø 3,80 ± 0,20 mm | White - RAL 9003 21,1 |
| CW 0622 | 6 x (7 x 0,18 mm) | 6 x 0,22 mm ² | ø 4,40 ± 0,20 mm | White - RAL 9003 28,0 |
| CW 0822 | 8 x (7 x 0,18 mm) | 8 x 0,22 mm ² | ø 4,70 ± 0,20 mm | White - RAL 9003 34,4 |
| CW 1022 | 10 x (7 x 0,18 mm) | 10 x 0,22 mm ² | ø 5,50 ± 0,20 mm | White - RAL 9003 41,7 |
| CW 1222 | 12 x (7 x 0,18 mm) | 12 x 0,22 mm ² | ø 5,70 ± 0,20 mm | White - RAL 9003 47,4 |
| CW 1422 | 14 x (7 x 0,18 mm) | 14 x 0,22 mm ² | ø 5,90 ± 0,20 mm | White - RAL 9003 53,1 |

ELECTRICAL PROPERTIES at 20°C

| CW | VOLTAGE | | CORES RESISTANCE | MIN. RESISTANCE INSULATION |
|----------|-----------|--------|------------------|----------------------------|
| | OPERATING | TEST | | |
| | 150 V | 2000 V | 140 Ohm/Km | 200 MOhm/Km |

The producer reserves himself to make modification on the item without any notice.