




FABBRICA CAVI - ANTENNE - ACCESSORI TV



POL 2...

LOUDSPEAKER CABLE

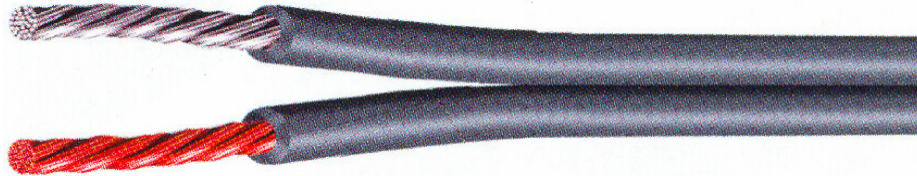

INNER CONDUCTOR PLAIN AND TINNED COPPER

SHEATH POLYVINYL-CHLORIDE

- **COLOUR** GREY - RAL 7001

TEMPERATURE RANGE -35 °C / +70 °C

MECHANICAL DATA

	CONSTRUCTION	SECTION	SHEATH	WEIGHT KG/KM	
				COPPER	TOTAL
POL 2025	2 x (8 x 0,20 mm)	2 x 0,25 mm ²	ø 1,80 x 3,60 ± 0,20 mm	4,5	10,6
POL 2035	2 x (11 x 0,20 mm)	2 x 0,35 mm ²	ø 2,20 x 4,40 ± 0,20 mm	6,2	15,4
POL 2050	2 x (16 x 0,20 mm)	2 x 0,50 mm ²	ø 2,30 x 4,60 ± 0,20 mm	8,9	18,7
POL 2075	2 x (24 x 0,20 mm)	2 x 0,75 mm ²	ø 2,50 x 5,00 ± 0,20 mm	13,4	24,5
POL 2100	2 x (32 x 0,20 mm)	2 x 1,00 mm ²	ø 2,70 x 5,40 ± 0,20 mm	17,9	30,4
POL 2150	2 x (30 x 0,25 mm)	2 x 1,50 mm ²	ø 3,00 x 6,00 ± 0,20 mm	26,2	41,2
POL 2200	2 x (32 x 0,28 mm)	2 x 2,00 mm ²	ø 3,30 x 6,60 ± 0,20 mm	35,1	52,7
POL 2250	2 x (40 x 0,28 mm)	2 x 2,50 mm ²	ø 3,70 x 7,40 ± 0,20 mm	43,8	66,0

ELECTRICAL PROPERTIES at 20°C

	VOLTAGE		CORES RESISTANCE
	OPERATING	TEST	
POL 2025	250 Vca	1000 Vca	66 Ohm/Km
POL 2035	250 Vca	1000 Vca	50 Ohm/Km
POL 2050	250 Vca	1000 Vca	39 Ohm/Km
POL 2075	250 Vca	1000 Vca	26 Ohm/Km
POL 2100	250 Vca	1000 Vca	18 Ohm/Km
POL 2150	250 Vca	1000 Vca	12 Ohm/Km
POL 2200	250 Vca	1000 Vca	9 Ohm/Km
POL 2250	250 Vca	1000 Vca	8 Ohm/Km

The producer reserves himself to make modification on the item without any notice.