




FABBRICA CAVI - ANTENNE - ACCESSORI TV

RG 6 AU-ZH

DOUBLE SCREENED 75 OHM RF COAXIAL CABLE
MANUFACTURED IN COMPLIANCE WITH MIL-C-17F STANDARDS
COMPLIANCE IEC 60754-1 IEC 60754-2 IEC 61034-2

Class CPR **E_{ca}**

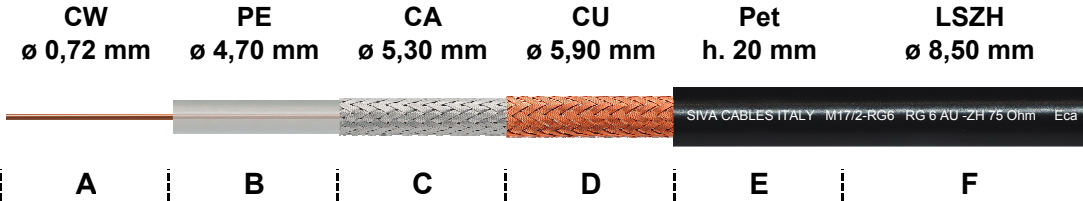

MECHANICAL DATA

A	INNER CONDUCTOR	COPPERWELD	\varnothing 0,72 ± 0,025 mm
B	DIELECTRIC	LOW DENSITY POLYETHYLENE	\varnothing 4,70 ± 0,10 mm
C	1° BRAID	SILVERED COPPER	144 x 0,16 mm
		- COVERAGE	97%
D	2° BRAID	PLAIN COPPER	144 x 0,16 mm
		- COVERAGE	95%
E	NON-MIGRATING	POLYESTER TAPE	h. 20 mm
F	SHEATH	FLAME RETARDANT NON-CORROSIVE THERMOPLASTIC FREE OF HALOGENS	\varnothing 8,50 ± 0,10 mm
	- COLOUR	BLACK - RAL 9004		
	- PRINTING	M17/2-RG6 MIL-C-17G RG 6 AU-ZH 75 Ohm LSZH		
		MADE IN ITALY CE 56 WEEK/YEAR EN 50575:2014 + A1:2016 Eca		

MINIMUM BENDING RADIUS (mm)

- SINGLE	\varnothing EXTERNAL X 5
- REPEATED	\varnothing EXTERNAL X 10
TEMPERATURE RANGE	-40 °C / +80 °C

CABLE WEIGHT (Kg/Km)

- COPPER	64,6
- PLASTIC	60,3
- TOTAL	125,3

ELECTRICAL PROPERTIES at 20°C

IMPEDANCE	75 ± 3 Ohm	RESISTANCE	
		- INNER CONDUCT.	97 Ohm/Km
CAPACITANCE	67 pF/m	- BRAID	5 Ohm/Km
VELOCITY RATIO	66%	TENSION	
		- SHEATH	6,0 kV
		SPARK TESTING	

ATTENUATIONS dB/100 m.

		dB	W
5	MHz	1,7	
10	MHz	2,4	
50	MHz	5,8	
100	MHz	8,5	
200	MHz	12,5	
400	MHz	18,0	

MAX. POWER RATING W

		dB	W
500	MHz	20,3	
600	MHz	22,6	
800	MHz	26,5	
1000	MHz	30,4	
1350	MHz	37,6	
1500	MHz	40,1	

		dB	W
1750	MHz	44,6	
2150	MHz	51,1	
2250	MHz	52,0	
2500	MHz	55,3	
2750	MHz	57,6	
3000	MHz	60,3	

STRUCTURAL RETURN LOSS dB

30 ÷ 300	MHz	>28	1000 ÷ 2000	MHz	>18
300 ÷ 600	MHz	>24	2000 ÷ 3000	MHz	>15
600 ÷ 1000	MHz	>22 ÷	MHz	-

SCREENING EFFECTIVENESS dB

100 ÷ 900	MHz	>78
900 ÷ 2000	MHz	-
2000 ÷ 3000	MHz	-

The producer reserves himself to make modification on the item without any notice.