




FABBRICA CAVI - ANTENNE - ACCESSORI TV

# CW 1022.7

WARNING CABLE  
CEI-UNEL 36762 C-4 (U<sub>o</sub> = 400 V)

Class CPR **E<sub>ca</sub>**

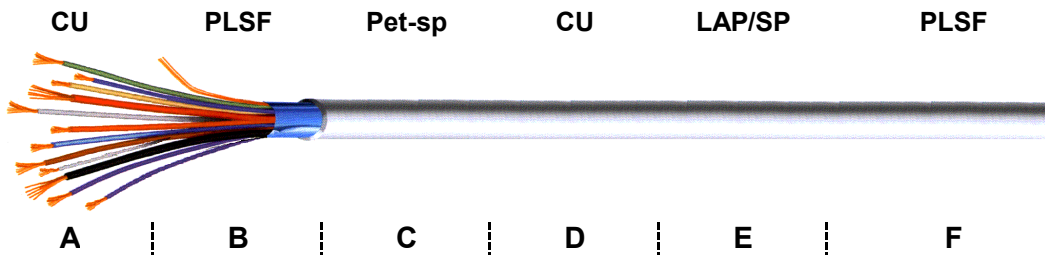

- A INNER CONDUCTOR ..... PLAIN COPPER
- B INSULATION ..... LOW SMOKE AND FUME POLYVINYL-CHLORIDE
- C NON-MIGRATING ..... SPIRAL POLYESTER TAPE
- D DRAIN WIRE ..... PLAIN COPPER
- E SHIELD ..... SPIRAL ALUMINIUM + POLYESTER TAPE  
COVERAGE 100%
- F SHEATH ..... LOW SMOKE AND FUME POLYVINYL-CHLORIDE

- PRINTING      **SIVA CAVO ALLARME 2 X 0,75 + 10 X 0,22 CEI-UNEL 36762**  
**C-4 (U<sub>o</sub> = 400 V) MADE IN ITALY CE 62 SETT/ANNO**  
**EN 50575:2014 + A1:2016 Eca**

TEMPERATURE RANGE ..... -25°C / +80°C

## MECHANICAL DATA

|                  | CONSTRUCTION                             | SECTION   | SHEATH                          | WEIGHT KG/KM TOTAL |
|------------------|--|---|---------------------------------|--------------------|
| <b>CW 1022.7</b> | 10 x (7 x 0,15 mm)<br>2 x (24 x 0,15 mm) | 10 x 0,22 mm <sup>2</sup><br>2 x 0,75 mm <sup>2</sup> | ø 7,40 ± 0,20 mm<br>bianco 9003 | 54,7               |

## ELECTRICAL PROPERTIES at 20°C

|                  | VOLTAGE   |        | CORES RESISTANCE     |                      | MIN. RESISTANCE INSULATION |
|------------------|-----------|--------|----------------------|----------------------|----------------------------|
|                  | OPERATING | TEST   | 0,22 mm <sup>2</sup> | 0,75 mm <sup>2</sup> |                            |
| <b>CW 1022.7</b> | 150 V     | 2000 V | 140 Ohm/Km           | 40 Ohm/Km            | 200 MOhm/Km                |

The producer reserves himself to make modification on the item without any notice.