


# CW 1222

WARNING CABLE  
CEI-UNEL 36762 C-4 (U<sub>o</sub> = 400 V)

Class CPR **E<sub>ca</sub>**

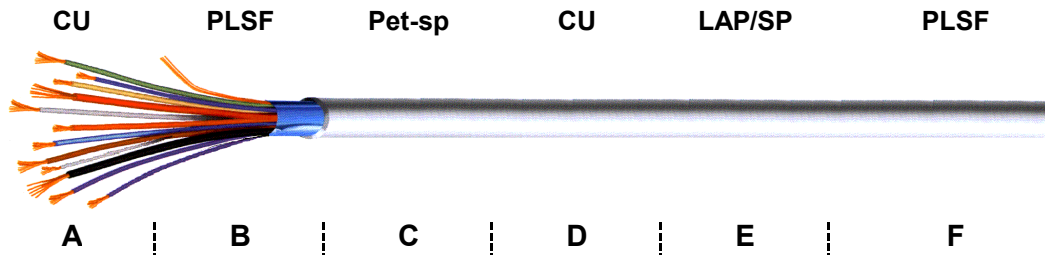

- A INNER CONDUCTOR ..... PLAIN COPPER
- B INSULATION ..... LOW SMOKE AND FUME POLYVINYL-CHLORIDE
- C NON-MIGRATING ..... SPIRAL POLYESTER TAPE
- D DRAIN WIRE ..... PLAIN COPPER
- E SHIELD ..... SPIRAL ALUMINIUM + POLYESTER TAPE  
COVERAGE 100%
- F SHEATH ..... LOW SMOKE AND FUME POLYVINYL-CHLORIDE

- PRINTING

**SIVA CAVO ALLARME 12 X 0,22 CEI-UNEL 36762  
C-4 (U<sub>o</sub> = 400 V) MADE IN ITALY CE 62 SETT/ANNO  
EN 50575:2014 + A1:2016 Eca**

TEMPERATURE RANGE ..... -25°C / +80°C

## MECHANICAL DATA

	CONSTRUCTION	SECTION	SHEATH	WEIGHT KG/KM TOTAL
<b>CW 1222</b>	12 x (7 x 0,15 mm)	12 x 0,22 mm <sup>2</sup>	ø 5,70 ± 0,20 mm	bianco 9003 41,4

## ELECTRICAL PROPERTIES at 20°C

	VOLTAGE		CORES RESISTANCE	MIN. RESISTANCE INSULATION
	OPERATING	TEST		
<b>CW 1222</b>	150 V	2000 V	140 Ohm/Km	200 MOhm/Km

The producer reserves himself to make modification on the item without any notice.